




# TUBE Lights

1

TUBE LIGHTS

2	WDTL-8T06 Series
3	WDTL-8T09 Series
4	WDTL-8T12 Series
5	WDTL-8T15 Series

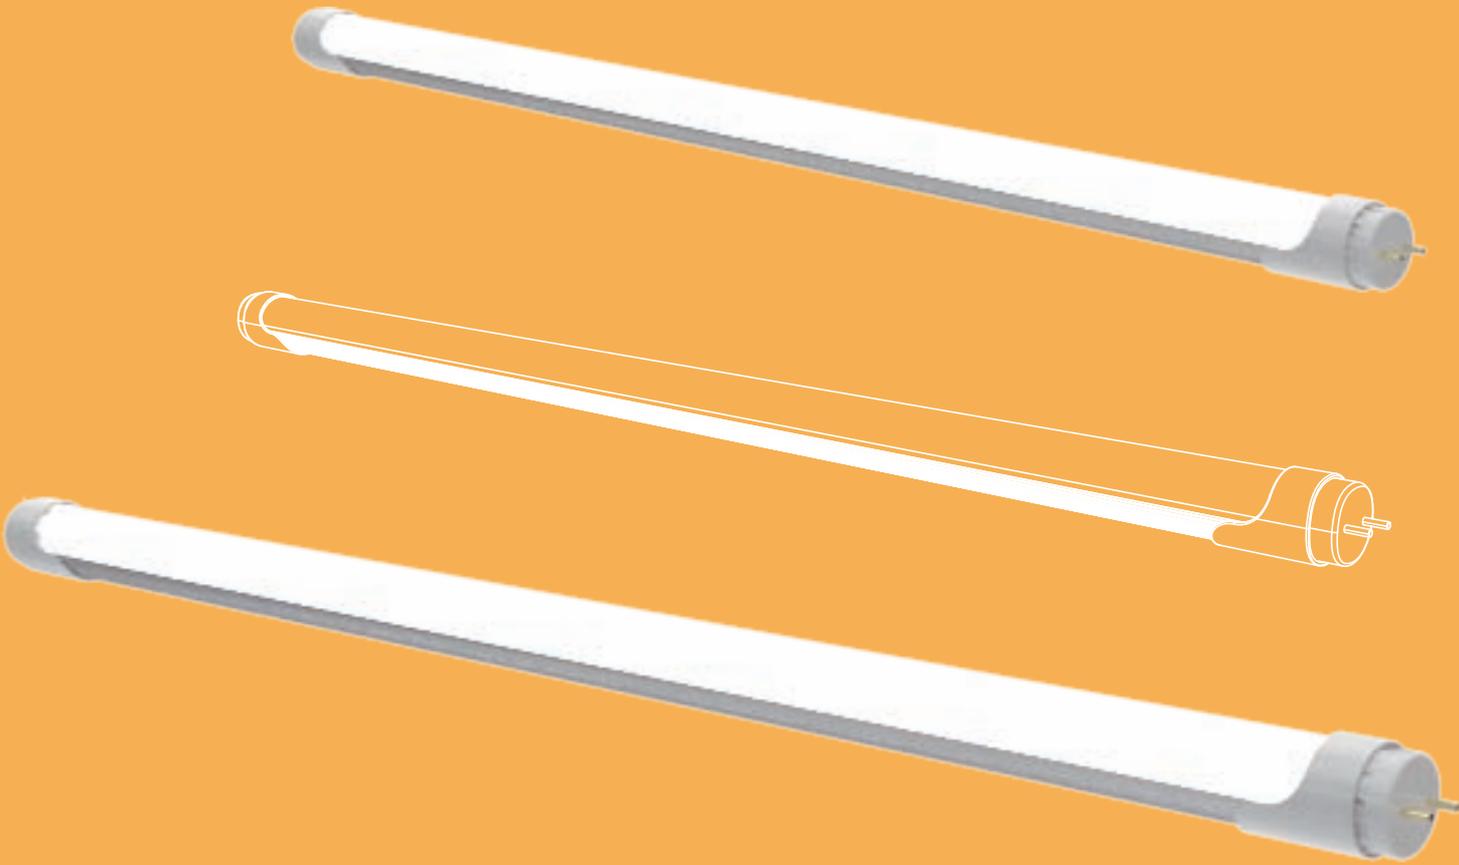

## T8 600mm LED Tube Light

MODEL : WDTL-8T06 Series



Length	600 mm
Wattage	9 Watt
Luminous Flux	1300 lm
Efficacy	145 lm/w
Color Temperature	3,000K(Warm White) 5,000K(Neutral White) 5,700K(Cool White)
Color Rendering Index	80
Beam Angle	120
Life Span	50,000 Hrs
Lamp Diameter	T8 (26mm)
Socket Base	G13
Input Voltage	AC 100~240(50/60Hz)

- WDTL-8T06MW: Milky Cover / Warm-White
- WDTL-8T06MN: Milky Cover / Neutral-White
- WDTL-8T06MC: Milky Cover / Cool-White
- WDTL-8T06CW: Clear Cover / Warm-White
- WDTL-8T06CN: Clear Cover / Neutral-White
- WDTL-8T06CC: Clear Cover / Cool-White

- High brightness LED
- 50,000 hours LED life
- UV free and no multi-shadow
- 100% compatibility with standard fluorescent lamp
- 270° Adjustable socket base

T8



- Excellent heat sink design cooling system
- WELDEX T8 LED tube series products supply a warm and cool white light that is comfortable for the eyes, making them the right choice for a wide spectrum of applications in all indoor environments.



## T8 900mm LED Tube Light


MODEL : WDTL-8T09 Series



Length	900 mm
Wattage	12 Watt
Luminous Flux	1700 lm
Efficacy	142 lm/w
Color Temperature	3,000K(Warm White) 5,000K(Neutral White) 5,700K(Cool White)
Color Rendering Index	80
Beam Angle	120
Life Span	50,000 Hrs
Lamp Diameter	T8 (26mm)
Socket Base	G13
Input Voltage	AC 100~240(50/60Hz)

- WDTL-8T09MW: Milky Cover / Warm-White
- WDTL-8T09MN: Milky Cover / Neutral-White
- WDTL-8T09MC: Milky Cover / Cool-White
- WDTL-8T09CW: Clear Cover / Warm-White
- WDTL-8T09CN: Clear Cover / Neutral-White
- WDTL-8T09CC: Clear Cover / Cool-White

- High brightness LED
- 50,000 hours LED life
- UV free and no multi-shadow
- 100% compatibility with standard fluorescent lamp
- 270° Adjustable socket base
- Excellent heat sink design cooling system
- WELDEX T8 LED tube series products supply a warm and cool white light that is comfortable for the eyes, making them the right choice for a wide spectrum of applications in all indoor environments.

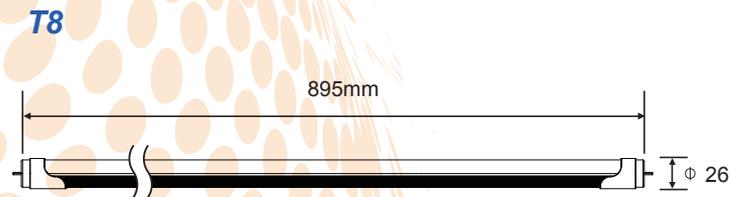

12W

T8

900mm

## T8 1200mm LED Tube Light

MODEL : WDTL-8T12M




Length	1200 mm
Wattage	18 Watt
Luminous Flux	2600 lm
Efficacy	145 lm/w
Color Temperature	3,000K(Warm White) 5,000K(Neutral White) 5,700K(Cool White)
Color Rendering Index	80
Beam Angle	120
Life Span	50,000 Hrs
Lamp Diameter	T8 (26mm)
Socket Base	G13
Input Voltage	AC 100~240(50/60Hz)

- WDTL-8T12MW: Milky Cover / Warm-White
- WDTL-8T12MN: Milky Cover / Neutral-White
- WDTL-8T12MC: Milky Cover / Cool-White
- WDTL-8T12CW: Clear Cover / Warm-White
- WDTL-8T12CN: Clear Cover / Neutral-White
- WDTL-8T12CC: Clear Cover / Cool-White

- High brightness LED
- 50,000 hours LED life
- UV free and no multi-shadow
- 100% compatibility with standard fluorescent lamp
- 270° Adjustable socket base
- Excellent heat sink design cooling system
- WELDEX T8 LED tube series products supply a warm and cool white light that is

comfortable for the eyes, making them the right choice for a wide spectrum of applications in all indoor environments.

T8

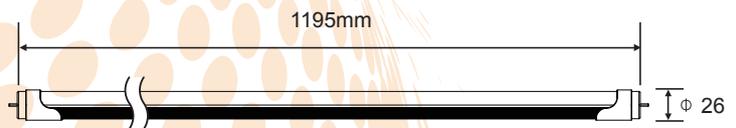

18W

T8

1200mm

## T8 1500mm LED Tube Light

MODEL : WDTL-8T15M



Length	1500 mm
Wattage	22 Watt
Luminous Flux	3200 lm
Efficacy	146 lm/w
Color Temperature	3,000K(Warm White) 5,000K(Neutral White) 5,700K(Cool White)
Color Rendering Index	80
Beam Angle	120
Life Span	50,000 Hrs
Lamp Diameter	T8 (26mm)
Socket Base	G13
Input Voltage	AC 100~240(50/60Hz)

- WDTL-8T15MW: Milky Cover / Warm-White
- WDTL-8T15MN: Milky Cover / Neutral-White
- WDTL-8T15MC: Milky Cover / Cool-White
- WDTL-8T15CW: Clear Cover / Warm-White
- WDTL-8T15CN: Clear Cover / Neutral-White
- WDTL-8T15CC: Clear Cover / Cool-White

- High brightness LED
- 50,000 hours LED life
- UV free and no multi-shadow
- 100% compatibility with standard fluorescent lamp
- 270° Adjustable socket base
- Excellent heat sink design cooling system

WELDEX T8 LED tube series products supply a warm and cool white light that is comfortable for the eyes, making them the right choice for a wide spectrum of applications in all indoor environments.



22W

T8

1500mm