


Features

*Harness: Leadwire

- 8.8" to 51.3" lengths available
- CREE high power LED (XTE)
- Long distance projection
- Die-cast aluminium housing for ultimate durability and protection
- Vertical heat sink designed for superior heat dissipation
- TIR lens adopted to maximize optical efficiency
- Waterproof connector available
- L type bracket

Specification

| | |
|-----------------------|--------------------------------|
| Wattage | 25W |
| Input voltage | DC10 ~ 36V |
| Current draw | 2.1A (@12V) |
| LED Qty | 6 |
| Color temperature | 3000K/5000K/5700K |
| Raw lumens | 2800lm |
| Actual lumens | 1900lm |
| Beam angle | 5° (V), 10°, 20°, 30°, 80° (H) |
| Housing color | Black |
| Operating temperature | -40° C ~ +80° C |
| IP rating | IP69K |
| Vibration rating | 30G |
| Lifespan | 50000 hrs |
| Length | 314mm (12.36") |

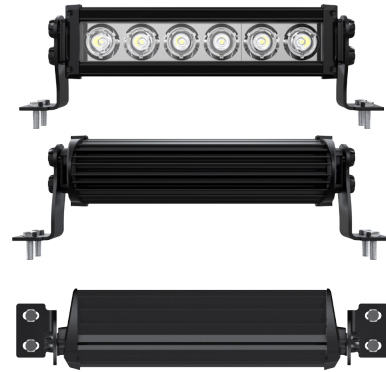

Driving Light Beam Pattern (@ Beam Angle 10°)

